


三五  **SWR**

<http://www.sanwu.com.tw>

聯體皮帶

標準型

A/HA.B/HB.C/HC.D/HD

A/AX.B/BX.C/CX

強力型

3V/9J.5V/15J.8V/25J

3VX/9JX.5VX/15JX.8VX/25JX

窄幅型

SPZ.SPA.SPB.SPC

XPZ.XPA.XPB.XPC

BANDED V-BELTS

經銷商




三五於追求「技術創新、永續經營」
之餘，仍保有對大自然之愛心。
ISO 9001 · ISO 14001 認證

DIMENSIONS OF PULLEYS

相鄰皮帶之間距(e)與皮帶輪溝契合一致，是運轉順暢、低噪音、長壽命的先決條件。請選用標準皮帶輪。

The most important parameter that determines whether the banded V-belt will be in the conditions of smooth running, small vibration, low noisy and long life time is the pitch between every next two belts match firmly to the pulley's ones or not.

(Standard pulley shall be used for all application)

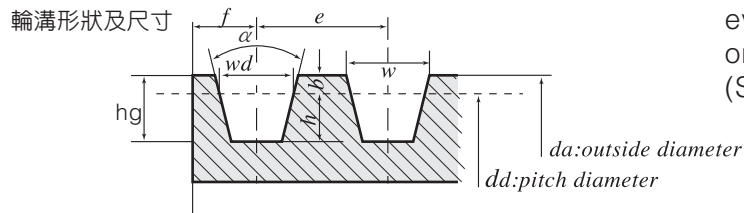

皮帶輪標準(1)V-pulley for Kraft bands with classical V-belts to ISO 5291

unit:mm

Section	da	α	w	b	hg min	e (1)	Σ Tol e (2)	f min
A	80 to 125 >125	34 38	13	1.5	12	15.88±0.3	±0.6	9
B	130 to 195 >195	34 38	16.5	2.0	14	19.05±0.4	±0.8	11.5
C	210 to 325 >325	34 38	22.4	3.0	19	25.4±0.5	±1.0	16
D	370 to 490 >490	36 38	32.8	4.5	26	36.53±0.6	±1.2	23

皮帶輪標準(2)V-pulley for Kraft Bands with wedge belts to ISO 5290

unit:mm

Section	da	α	w	hg min	e	Σ Tol e	f min
3V/9N	67 to 90 >90 to 150 >150 to 300 >300	36 38 40 42	8.9	8.9	10.3±0.25	±0.5	9
5V/15N	180 to 250 >250 to 400 >400	38 40 42	15.2	15.2	17.5±0.25	±0.5	13
8V/25N	315 to 400 >400 to 560 >560	38 40 42	25.4	25.4	28.6±0.4	±0.8	19

皮帶輪標準(3)V-pulley for narrow wedge belts to ISO 4183

unit:mm

Section	dd	α	wd	b min	h min	e	Σ Tol e	f min
SPZ	63 to 80 >80	34 38	8.5	2	9	12±0.3	±0.6	7
SPA	90 to 118 >118	34 38	11	2.75	11	15±0.3	±0.6	9
SPB	140 to 190 >190	34 38	14	3.5	14	19±0.4	±0.8	11.5
SPC	224 to 315 >315	34 38	19	4.8	19	25.5±0.5	±1	16

(1)兩個相鄰接輪溝中心間的公差

(2)輪溝中心間的累積公差

(1) Tolerance for the dimension "e" between two adjacent grooves.

(2) The sum of all deviations from the nomin 1 dimension "e" for all the groove spacings of a pulley must as not above exceed the tolerance shown.

三五橡膠廠股份有限公司
SAN WU RUBBER MFG. CO., LTD.



總公司 彰化縣和美鎮彰美路二段106號
□ TEL:(04)7355142~6 FAX:(04)7353802
國貿課 TEL:(04)7361445~6 FAX:(04)7365900
E-mail address:sanwuex@ms15.hinet.net
http://www.sanwu.com.tw

台北門市部 TEL:(02)25552325~6 FAX:(02)25567847
桃園加工廠 TEL:(03)3262070~2 FAX:(03)3258432
台南營業所 TEL:(06)2279955~6 FAX:(06)2209610
高雄加工廠 TEL:(07)7132908 FAX:(07)7719959
花蓮加工廠 TEL:(03)8234061~3 FAX:(03)8232386


POWER BANDED V-BELTS

符合ISO、DIN、RMA-MPTA
JIS等國際規格

San Wu banded V-Belt are conformed to international Standard specification such as ISO. DIN. RMA-MPTA and JIS.



包布式 Wrapped Type

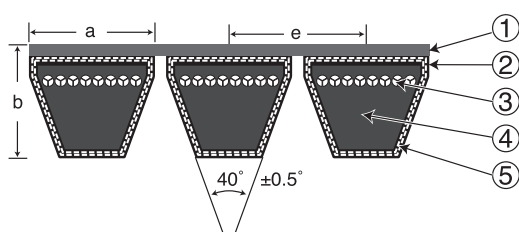


- ① 聯結面
- ② 接著膠
- ③ 心索
- ④ 底膠
- ⑤ 外包布

TYPE	a mm	b mm	e mm	Pd Ømm	長度範圍 Belt Range
A/HA	13	12	15.88	80	33~170"
B/HB	17	14	19.05	125	33~450"
C/HC	22	16.8	25.4	200	40~560"
D/HD	32	21.8	37	355	93~560"
3V/9J	9	10.5	10.3	67	33~160"
5V/15J	15	15.5	17.5	180	33~450"
8V/25J	25	25.5	28.6	315	93~560"
SPZ	9.7	11.4	12	90	838~4064mm
SPA	12.7	13.4	15	120	838~4318mm
SPB	16.3	16	19	180	838~11430mm
SPC	22	20.8	25.5	250	2310~11430mm

Pd: min pulley diameter (適用最小輪徑)

切邊式 Raw Edge Type

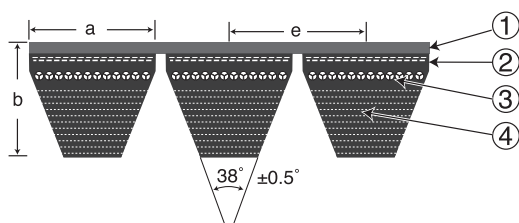

- ① Joint Tie Across The Top
- ② Filler Rubber
- ③ Tensile Members
- ④ Base Rubber
- ⑤ Rubber impregnated canvas

TYPE	a mm	b mm	e mm	Pd Ømm	長度範圍 Belt Range
A/AX	13	10	15.88	80/71	33~170"
B/BX	17	13	19.05	125/112	33~300"
C/CX	22	16	25.4	200/180	40~300"
3V/3VX	9	10	10.3	67/56	33~300"
5V/5VX	15	15	17.5	180/140	33~300"
8V/8VX	25	25	28.6	315/315	93~300"
SPZ/XPZ	9.7	10	12	90/63	838~4064mm
SPA/XPA	12.7	12	15	120/90	838~4318mm
SPB/XPB	16.3	15	19	180/140	838~7600mm
SPC/XPC	22	20	25.5	250/220	2310~7600mm

AX/BX.....XPC: raw edge cogged type (切邊齒型式)

A.B.CSPC: raw edge type (切邊式)

